




Commercial

V-Beam

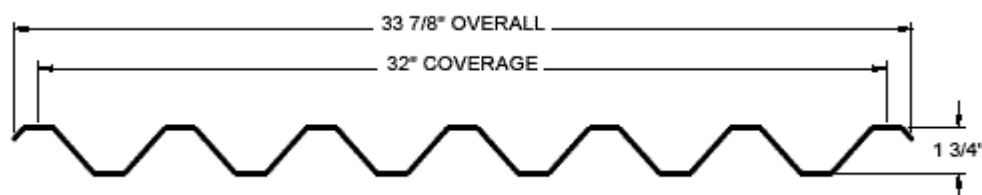

- Minimum slope for roofing applications is 2:12
- Available in .040" and .050" aluminum
- Excellent strength and spanning capability
- Diaphragm capacity per ICBO Evaluation Report
- Minimum Roof Slope: 2:12
- Standard Lengths: 6' to 45'
- Standard Available Width*: 32"
(painted aluminum = 32"; unpainted aluminum = 42 2/3")

* Width Notes:

From 48.25" Coil, 38.25" Formed Width and 32" Coverage

From 44.375" Coil, 35" Formed Width and 32" Coverage

From 57" Coil, 44.875" Formed Width and 42.67" Coverage